


# Operating Manual

## HPP26DMF Hydraulic Powerpack

From serial number: 11315

Revised  
16.08.2016

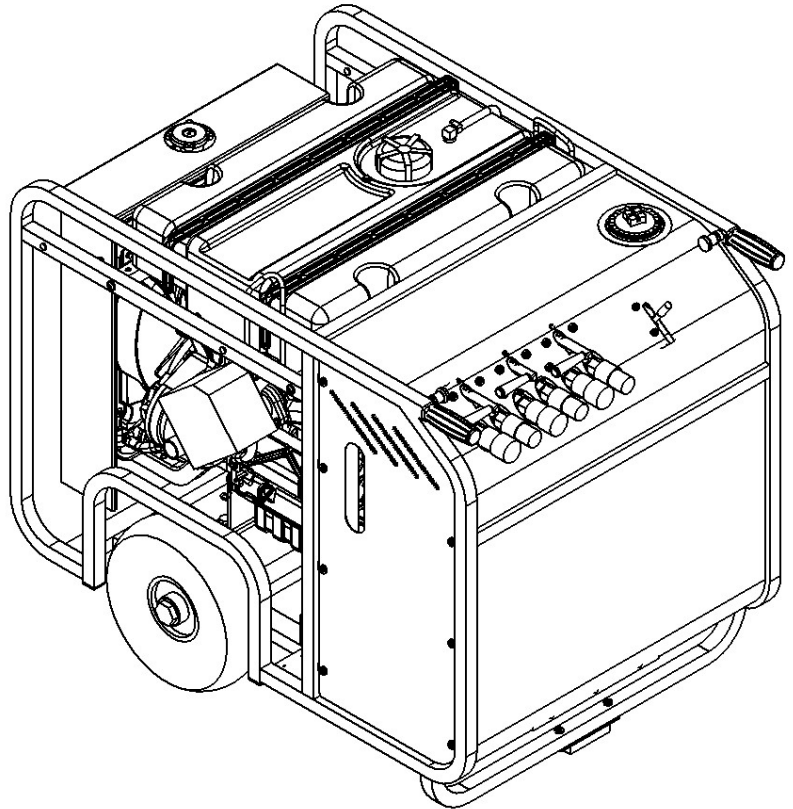

### Prior to Operation

We thank you for choosing a HYCON powerpack.

Please note that the powerpack is delivered without hydraulic oil, and therefore it must be filled up with hydraulic oil prior to operation.

To ensure smooth operation and long-lasting performance of your new powerpack, we recommend that you study this operating manual carefully and pay special attention to the

### Safety and Service Precautions

We hope you will be satisfied with your new HYCON powerpack.

Best regards  
HYCON A/S



**HYCON A/S**  
Juelstrupparken 11  
DK-9530 Støvring  
Denmark

Tel: +45 9647 5200  
Fax: +45 9647 5201  
Mail [hycon@hycon.dk](mailto:hycon@hycon.dk)  
[www.hycon.dk](http://www.hycon.dk)

# Contents

	Page
Safety precautions.....	2
Filling up hydraulic oil .....	2
Technical data.....	3
Starting instructions .....	4
Setting of flow .....	4
Service, maintenance and hydraulic settings .....	5
Oil types .....	6
Warranty conditions .....	6
Spare parts list.....	7

## Safety Precautions

1. Always use protective earplugs. Daily long-lasting operation there is a risk of hearing defects.
2. Always connect hoses before starting.
3. Never add fuel and oil when the engine is running.
4. In case of non-operation or performance of service, always turn off the engine.
5. Never start the engine without side covers.
6. Operation of the powerpack without tool connected and with lever at "ON" may cause overheating of the system and damage to the powerpack.
7. When lifting the powerpack from a vehicle, we recommend the use of a crane.
8. The pressure relief valves are set at 160 bar from our plant. Never set them higher.
9. Always use filters with by-pass. The use of filters without by-pass may blow the hydraulic hoses and the filter cover.

## Filling Up Hydraulic Oil

- To fill up with hydraulic oil, loosen the filter cover on top of the powerpack.
- Remove the filter element (see photo), and fill up with oil. When oil is showing at the bottom of the filter unit, there is enough oil on the powerpack.
- Insert the filter element again, mount the cover and the powerpack is ready for use.

*Please note: When connecting new extension hoses, it is necessary to fill up with extra 2 litres of oil. Therefore always top up the powerpack when connecting new extension hoses.*



## Technical Data

### Hydraulics

The HYCON HPP26DMF open centre Powerpack is designed in accordance with the EHTMA categories D, E and F, which prescribe a performance of 30, 40 and 60 l.p.m. respectively at 138 bar. The HYCON powerpack is fully compatible with and sufficient for the common European tools.

The powerpack is mounted with a double pump (two independent hydraulic circuits), and it has three connections for each circuit separately or both circuits simultaneously. This way the powerpack can operate two tools simultaneously. For a more detailed description, please refer to the section about "Setting of Flow"

The powerpack is mounted with pressure relief valves to avoid a too high pressure. Furthermore, the very efficient air cooling protects the powerpack against overheating. The powerpack has no POR system, and the engine r.p.m. (oil flow) is adjusted manually by means of the throttle.

Oil flow connection A	30 l.p.m. at 2000 r.p.m. 40 l.p.m. at 2600 r.p.m. 60 l.p.m. at 3600 r.p.m.
Oil flow connections B and C	15 l.p.m. at 2000 r.p.m. 20 l.p.m. at 2600 r.p.m. 30 l.p.m. at 3600 r.p.m.
Working pressure nominal	120 bar
Pressure relief valves	Set at 160 bar
Pump	Double gear pump
Oil temperature	Max. 70° C
Capacity hydraulic oil tank	Min. 11 litres/max. 15 litres
Capacity fuel tank	25 litres
Hydraulic system complete	16 litres
Filter system (filter element)	25 Micron with by-pass
Engine	Lombardini 3-cylinder 26 HP (gross power) 4-stroke diesel Fuel: Diesel Engine oil 2.4 litres
Guaranteed sound power level $L_{WA}$ Sound pressure level 1 m $L_{PA}$	
Dimensions (LxWxH)	1040x740x850 mm
Weight w/o hydraulic oil	230 kg

# Starting Instructions

Please observe the starting instructions on the front of the powerpack.

## Start:

- Check engine oil level
- Check hydraulic oil level at sight glass
- Connect hoses and tool
- Switch fuel tap to "ON"
- Turn ignition key
- Wait until engine warning light disappears
- Activate electric start
- Set the flow – see below

## Stop:

- Move all levers to "OFF"
- Turn off the ignition switch
- Turn the fuel tap to "OFF"

# Setting of Flow

The powerpack has three connections, allowing for connection of two tools simultaneously. The connections are marked A, B and C, respectively.

The oil flow can be adjusted by regulating the engine r.p.m. by means of the throttle. Connection A can be set to 30-60 l.p.m. Connections B and C can be set to 15-30 l.p.m. Connection A cannot be used simultaneously with connections B and C.

Each connection is equipped with an ON-OFF lever. Connections not in use must be set at OFF, and connections in use must be set at ON. Connections B and C can only be used when connection A is OFF. Never turn the lever to ON if no tool is connected.



## Service, Maintenance and Hydraulic Settings

Service/Maintenance	Daily	Weekly	Yearly
Hydraulic oil	Check		1 x replacement
Hydraulic oil filter *)			1 x replacement
Check hoses		(tighten up if needed)	
Air filter			1 x replacement
Fuel filter			1 x replacement

\*) use only filters with by-pass

### Engine service

The engine must be serviced according to the Lombardini service book

### Hydraulic Settings

Check the working pressure by means of test equipment. The test equipment must comprise a pressure gauge, a flow meter and a valve for adjustment of pressure.

The pressure relief valves are placed on the valve block. There are two pressure relief valves (one for each hydraulic circuit), and they must be adjusted individually. The pressure relief valves are marked with B and C respectively.

1. Connect the test equipment to connection B, start the powerpack and move the B lever to ON and the A and C levers to OFF. Then close the valve on the test equipment and adjust the pressure relief valve B according to the technical data.

Adjust the pressure relief valve by loosening the lock nut and turning the adjustment screw in or out. "In" increases the pressure, and "out" decreases the pressure.

Retighten the lock nut after adjustment.

Connect the test equipment to connection C, start the powerpack and move lever C to ON and levers A and B to OFF. Then close the valve on the test equipment and adjust the pressure relief valve C according to the technical data.

2. Having adjusted the pressure relief valves correctly, set the working pressure to 100 bar by means of the valve on the test equipment. At 100 bar the oil flow should correspond to the flow rate which the lever is set at (see Setting of Flow).

If correct pressure/oil flow cannot be achieved by following the above instructions, the powerpack must be re-adjusted. If the pressure/oil flow is then still incorrect, the pump is defect and must be replaced.

## Oil Types

The HYCON powerpack uses standard hydraulic oil, i.e. all types of mineral oil and biodegradable oil, which comply with the following values:

<b>Ambient temperature range</b>	Below 10°C 50°F	10 ... 30°C 50 ... 86°F	Above 30°C 86°F
<b>Recommended oil viscosity grade</b>	VG 32	VG 46	VG 68

<b>Recommended oil cleanliness</b>	ISO 4406 /19/16 / NAS 1638 10	
<b>Permitted viscosity</b>	cSt	10 – 600
<b>Viscosity index</b>	Minimum	100
<b>Oil temperature area</b>	°C /°F	-20 to 70 / -4 to 158

## Warranty Conditions

We grant 12 months warranty from the first date of operation – however, not more than 18 months from the date of delivery.


The warranty applies to faults that can be related to construction and production errors.

Faults caused by incorrect operation, incorrect handling, lack of maintenance or the like will not be accepted as warranty.

The warranty covers the parts necessary for repair and the suggested average time needed for repair.

For further warranty details, please contact your local dealer.

HYCON A/S  
Juelstrupparken 11  
DK-9530 Støvring  
Denmark



Martin Møller  
Managing Director  
26.07.2019